



## Features

- 60000 counts dual-slope SADC (2 cnvs/s.)
- Input signal full scale: 630mV (Max. 63000 count)
- Built-in 600 counts fast speed (x10) FADC
- Fast ADC conversion rate: 20 times/s
- 100L LQFP package
- 3V DC regulated power supply
- Support digital multi-meter function
  - \*Voltage measurement (AC/DC)
  - \*Current measurement (AC/DC)
  - \*Dual mode for frequency with voltage or current
  - \*Resistance measurement (600.00Ω – 60.000MΩ)
  - \*Conductance measurement (60.00nS)
  - \*Capacitance measurement (6.000nF – 60.00mF)  
(Taiwan patent no.: 323347, 453443)
  - \*Diode or continuity mode measurement
  - \*Frequency counter with duty cycle display:  
60.000Hz – 60.000MHz  
5.0% – 95.0%
- ADP mode (AC or DC mode is available)
- 3dB BW selectable for low pass filter at AC mode  
(Taiwan patent no.: 362409)  
(China patent no.: 1363073)
- Band-gap reference voltage output
- Peak-hold measurement  
(Taiwan patent no.:476418)
- 3-wire serial bus for MPU I/O port
- MPU I/O power level selectable by external pins
- On-chip buzzer driver and frequency selectable by MPU command
- High-crest-factor signal detection  
(Taiwan patent no.: 234661)
- Multi-level battery voltage detection
- Support sleep mode by external chip select pin

## Application

Clamp-on meter


Digital multi-meter

## Description

ES51998 is an analog frond end chip of DMM built-in 60000(SADC)/600(FADC) counts dual ADCs. The SADC is operated at slower speed for higher resolution. The FADC is operated at higher speed for lower resolution. ES51998 provides voltage & current (AC/DC) measurement, resistance measurement, capacitance measurement, diode/continuity measurement, frequency measurement, duty cycle measurement and voltage peak-hold function. An analog switches network is built-in for insulation resistance application. The ES51998 also supports multi-level battery detection, low-pass-filter feature for AC mode and dual mode measurement for V+F & A+F. A 3-wire serial bus for MPU I/O port will be used easily for firmware design. Flexible function design is supported for different kinds of DMM or Clamp-on meter application.



Pin Assignment

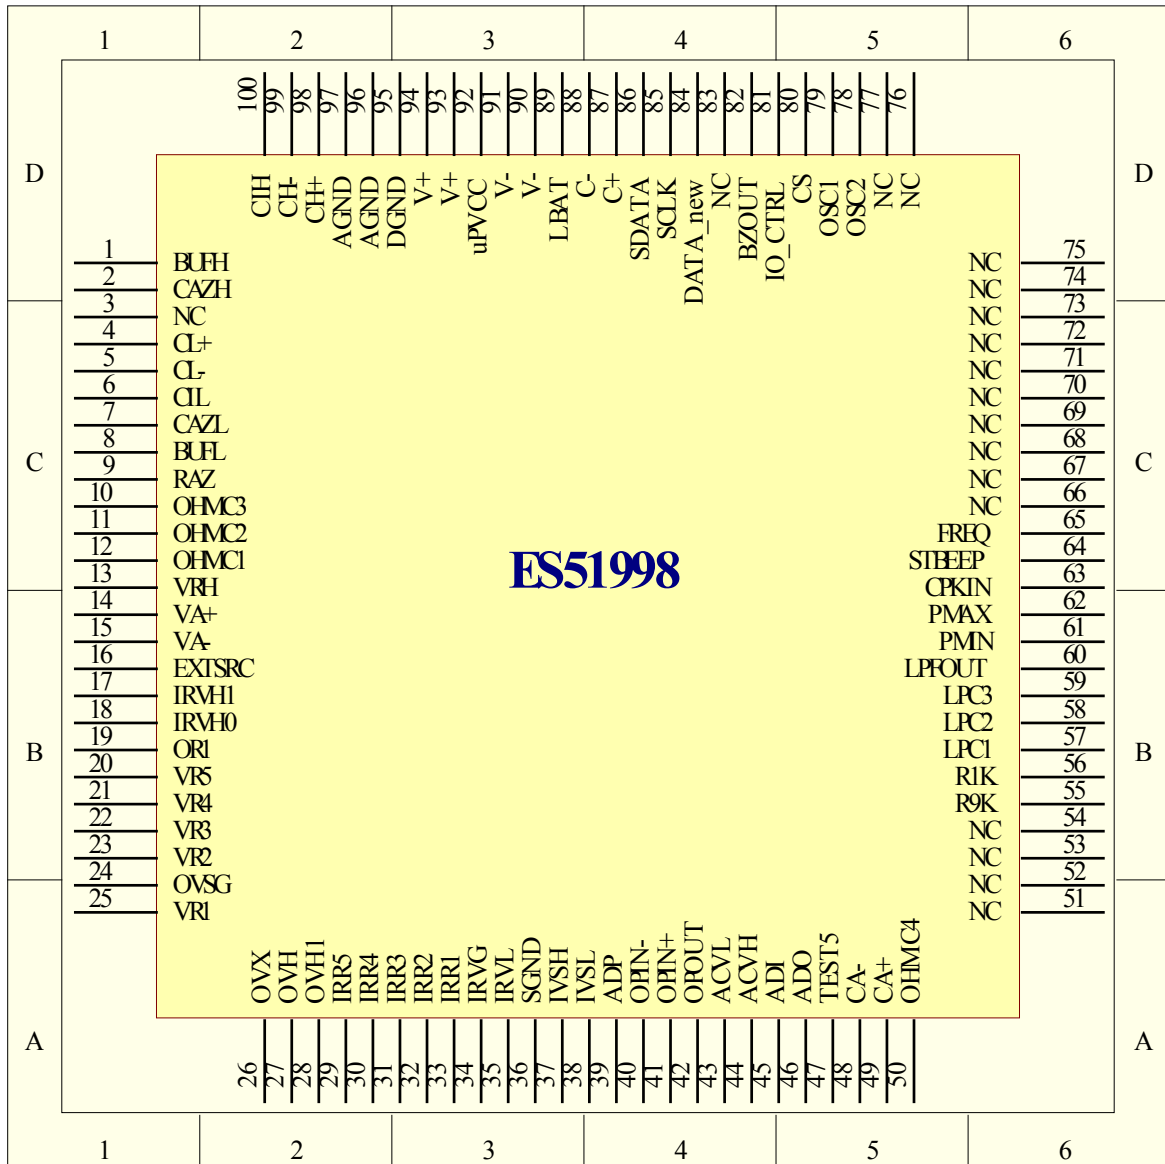



### Pin Description

| Pin No | Symbol | Type | Description  |
|--------|--------|------|--|
| 1      | BUFH   | O    | High-speed buffer output pin. Connect to integral resistor.                                      |
| 2      | CAZH   | O    | High-speed auto-zero capacitor connection.   |
| 3      | NC     | -    | Not connected  |
| 4      | CL+    | IO   | Positive connection for reference capacitor of high-resolution A/D.                              |
| 5      | CL-    | IO   | Negative connection for reference capacitor of high-resolution A/D.                              |
| 6      | CIL    | O    | High-resolution integrator output. Connect to integral capacitor.                                |
| 7      | CAZL   | O    | High-resolution auto-zero capacitor connection.  |
| 8      | BUFL   | O    | High-resolution Buffer output pin. Connect to integral resistor                                  |
| 9      | RAZ    | O    | Buffer output pin in AZ and ZI phase.  |
| 10     | OHMC3  | O    | Filter capacitor connection for resistance mode.   |
| 11     | OHMC2  | O    | Filter capacitor connection for resistance mode.   |
| 12     | OHMC1  | O    | Filter capacitor connection for resistance mode.   |
| 13     | VRH    | O    | Output of band-gap voltage reference. Typically -1.23V   |
| 14     | VA+    | I    | De-integrating voltage positive input. The input should be higher than VA-.                      |
| 15     | VA-    | I    | De-integrating voltage negative input. The input should be lower than VA+.                       |
| 16     | EXTSRC | I    | External source input available for Res/Diode/ADP mode   |
| 17     | IRVH1  | O    | High voltage measurement range1 for insulation R mode  |
| 18     | IRVH0  | O    | High voltage measurement range0 for insulation R mode  |
| 19     | OR1    | O    | Reference resistor connection for 600.00Ω range  |
| 20     | VR5    | O    | Voltage measurement ÷10000 attenuator(1000.0V)   |
| 21     | VR4    | O    | Voltage measurement ÷1000 attenuator(600.00V)  |
| 22     | VR3    | O    | Voltage measurement ÷100 attenuator(60.000V)   |
| 23     | VR2    | O    | Voltage measurement ÷10 attenuator(6.0000V)  |
| 24     | OVSG   | O    | Sense low voltage for resistance/voltage measurement   |
| 25     | VR1    | I    | Measurement Input. Connect to a precise 10MΩ resistor.   |
| 26     | OVX    | I    | Sense input for resistance/capacitance measurement   |
| 27     | OVH    | O    | Output connection for resistance measurement   |
| 28     | OVH1   | O    | Output connection1 for resistance measurement (optional)   |
| 29     | IRR5   | I    | Test mode used (optional)  |
| 30     | IRR4   | I    | Current shunt resistor4 connection for insulation R mode   |
| 31     | IRR3   | I    | Current shunt resistor3 connection for insulation R mode   |
| 32     | IRR2   | I    | Current shunt resistor2 connection for insulation R mode   |
| 33     | IRR1   | I    | Current shunt resistor1 connection for insulation R mode   |
| 34     | IRVG   | I    | Voltage measurement terminal low-side of shunt resistor  |
| 35     | IRVL   | I    | Voltage measurement terminal high-side of shunt resistor   |
| 36     | SGND   | G    | Signal Ground.   |
| 37     | IVSH   | I    | Current measurement input for 6000.0μA, 600.00mA and 60.000A modes.                              |
| 38     | IVSL   | I    | Current measurement input for 600.00μA, 60.000mA.  |
| 39     | ADP    | I    | Measurement input in ADP mode.   |
| 40     | OPIN-  | I    | Independent operational amplifier negative input   |
| 41     | OPIN+  | I    | Independent operational amplifier positive input   |
| 42     | OPOUT  | O    | Independent operational amplifier output   |
| 43     | ACVL   | O    | DC signal low input in ACV/ACA mode. Connect to negative output of external AC to DC converter.  |
| 44     | ACVH   | O    | DC signal high input in ACV/ACA mode. Connect to positive output of external AC to DC converter. |
| 45     | ADI    | I    | Negative input of internal AC-to-DC OPAMP.   |
| 46     | ADO    | O    | Output of internal AC-to-DC OPAMP.   |
| 47     | TEST5  | O    | Buffer output of OVSG  |
| 48     | CA-    | IO   | Negative auto-zero capacitor connection for capacitor measurement                                |



|       |          |    |   |
|-------|----------|----|---|
| 49    | CA+      | IO | Positive auto-zero capacitor connection for capacitor measurement                                 |
| 50    | OHMC4    | O  | Filter capacitor connection for resistance mode.  |
| 51    | NC       | -  | Not connected   |
| 52    | NC       | -  | Not connected   |
| 53    | NC       | -  | Not connected   |
| 54    | NC       | -  | Not connected   |
| 55    | R9K      | O  | Connect to a precise 9K $\Omega$ resistor for capacitor measurement.                              |
| 56    | R1K      | O  | Connect to a precise 1K $\Omega$ resistor for capacitor measurement.                              |
| 57    | LPC1     | O  | Capacitor C1 connection for internal low-pass filter  |
| 58    | LPC2     | O  | Capacitor C2 connection for internal low-pass filter  |
| 59    | LPC3     | O  | Capacitor C3 connection for internal low-pass filter  |
| 60    | LPFOUT   | O  | Capacitor C1 connection for internal low-pass filter  |
| 61    | PMIN     | O  | Minimum peak hold output  |
| 62    | PMAX     | O  | Maximum peak hold output.   |
| 63    | CPKIN    | I  | Bypass capacitor for peak mode  |
| 64    | STBEEP   | O  | Fast low-impedance sensed output for CONT./Diode mode Build-in a internal comparator for OVX pin. |
| 65    | FREQ     | I  | Frequency counter input, offset V-/2 internally by the chip.                                      |
| 66-77 | NC       | -  | Not connected   |
| 78    | OSC2     | O  | Crystal oscillator output connection  |
| 79    | OSC1     | I  | Crystal oscillator input connection   |
| 80    | CS       | I  | Set to high to enable ES51998. Set to low to enter sleep mode                                     |
| 81    | IO_CTRL  | I  | MPU I/O level LOW setting. Connect to DGND or V-.   |
| 82    | BZOUT    | I  | Buzzer frequency output. Normal low state.  |
| 83    | NC       | -  | Not connected   |
| 84    | DATA_NEW | O  | New ADC data ready  |
| 85    | SCLK     | I  | Serial clock input  |
| 86    | SDATA    | IO | Serial data input/output  |
| 87    | C+       | O  | Positive capacitor connection for on-chip DC-DC converter.  |
| 88    | C-       | O  | Negative capacitor connection for on-chip DC-DC converter.  |
| 89    | LBAT     | I  | Low battery configuration input.  |
| 90    | V-       | P  | Negative supply voltage.  |
| 91    | V-       | P  | Negative supply voltage.  |
| 92    | uPVCC    | P  | Switch 5 for function selection.  |
| 93    | V+       | O  | Output of on-chip DC-DC converter.  |
| 94    | V+       | O  | Output of on-chip DC-DC converter.  |
| 95    | DGND     | G  | Digital ground.   |
| 96    | AGND     | G  | Analog ground.  |
| 97    | AGND     | G  | Analog ground.  |
| 98    | CH+      | IO | Positive connection for reference capacitor of high-speed A/D.                                    |
| 99    | CH-      | IO | Negative connection for reference capacitor of high-speed A/D.                                    |
| 100   | CIH      | O  | High-speed integrator output. Connect to integral capacitor.                                      |



## Absolute Maximum Ratings

| Characteristic                     | Rating                      |
|------------------------------------|-----------------------------|
| Supply Voltage (V- to AGND)        | -4V                         |
| Analog Input Voltage & EXT SRC pin | V- -0.6 to V+ +0.6          |
| V+                                 | V+ $\geq$ (AGND/DGND+0.5V)  |
| AGND/DGND                          | AGND/DGND $\geq$ (V- -0.5V) |
| Digital Input (IO_CTRL=V-)         | V- -0.6 to uPVCC+0.6        |
| Power Dissipation. Flat Package    | 500mW                       |
| Operating Temperature              | 0°C to 70°C                 |
| Storage Temperature                | -55°C to 125°C              |

## Electrical Characteristics

TA=25°C, V- = -3.0V

| Parameter  | Symbol           | Test Condition                      | Min.  | Typ.            | Max   | Units             |
|--|------------------|-------------------------------------|-------|-----------------|-------|-------------------|
| Power supply                                       | V-               |                                     | -2.8  | -3.0            | -3.2  | V                 |
| Operating supply current                           | I <sub>DD</sub>  | Normal operation                    | —     | 2.8             | 3.2   | mA                |
| In DCV mode  | I <sub>SS</sub>  | In sleep mode                       | —     | 1               | 3     | μA                |
| SADC <sup>2</sup> Voltage roll-over error          |                  | 10MΩ input resistor                 | —     | —               | ±0.01 | %F.S <sup>1</sup> |
| FADC <sup>3</sup> Voltage roll-over error          |                  | 10MΩ input resistor                 | —     | —               | ±0.5  | %F.S <sup>1</sup> |
| SADC <sup>2</sup> voltage nonlinearity             | NLV1             | Best case straight line             | —     | —               | ±0.01 | %F.S <sup>1</sup> |
| FADC <sup>3</sup> voltage nonlinearity             | NLV2             | Best case straight line             | —     | —               | ±1.0  | %F.S <sup>1</sup> |
| Voltage full scale range of SADC <sup>2</sup>      |                  | VA+-VA- = 200mV                     | —     | 600             | 630   | mV                |
| Voltage full scale range of FADC <sup>3</sup>      |                  | VA+-VA- = 200mV                     | —     | 600             | —     | mV                |
| Input Leakage for VR1 input                        |                  |                                     | -10   | 1               | 10    | pA                |
| Zero input reading                                 |                  | 10MΩ input resistor                 | -000  | 000             | +000  | Count             |
| Band-gap reference voltage                         | V <sub>RH</sub>  | 100KΩ resistor between VRH and AGND | -1.30 | -1.22           | -1.14 | V                 |
| Open circuit voltage for 600Ω range measurement    |                  |                                     | —     | V-              | —     | V                 |
| Open circuit voltage for other Ω measurement       |                  |                                     | —     | V <sub>RH</sub> | —     | V                 |
| Open circuit voltage for 60.00nS range measurement |                  |                                     | —     | -0.68           | —     | V                 |
| Internal pull-high to 0V current                   |                  | Between V- pin and CS               | —     | 1.2             | —     | μA                |
| AC frequency response at 6.000V range              |                  | ±1%                                 | —     | 40-400          | —     | HZ                |
|  |                  | ±5%                                 | —     | 400-2000        | —     |                   |
| OP unity gain bandwidth                            | GB               | C <sub>L</sub> =10pF                | —     | 200             | —     | kHz               |
| OP slew rate at unity gain                         | SR               | R <sub>L</sub> =10MΩ                | —     | 3.5             | —     | V/us              |
| OP input offset voltage                            | V <sub>IO</sub>  |                                     | —     | 0.1             | —     | mV                |
| OP input bias current                              | I <sub>B</sub>   |                                     | —     | 10              | —     | pA                |
| OP input common mode voltage range                 | V <sub>ICR</sub> |                                     | —     | ±2              | —     | V                 |



|   |           |  |      |      |     |                   |
|---|-----------|--|------|------|-----|-------------------|
| 3dB frequency for LPF <sup>4</sup> active     | $f_{3dB}$ | 3dB=Full (ADP)   | 100  | —    | —   | kHz               |
|   |           | 3dB=10k (ADP)  | —    | 10   | —   | kHz               |
|   |           | 3dB=1k (ADP)   | —    | 1    | —   | kHz               |
| Multi-level low battery detector              | $V_{t1}$  | LBAT vs. V-  | —    | 2.15 | —   | V                 |
|   | $V_{t2}$  |  | —    | 2.03 | —   | V                 |
|   | $V_{t3}$  |  | —    | 1.83 | —   | V                 |
| Peak-hold mode pulse width                    |           | ACIN =40 ~ 400Hz   | —    | 1000 | —   | us                |
| STBEEP comparator in Diode mode               |           | OVX to SGND  | —    | +9   | —   | mV                |
| STBEEP comparator in Cont. mode               |           | OVX to SGND  | —    | -7   | —   | mV                |
| HCF detection voltage                         |           | VR2-VR5  | —    | 1100 | —   | mV                |
| Frequency input sensitivity ( <i>FREQ</i> )   | $F_{in}$  | Square wave with<br>Duty cycle 40-60%  | 500  | —    | —   | mVp               |
| Frequency input sensitivity ( <i>FREQ</i> )   | $F_{in}$  | Sine wave  | 400  | —    | —   | mVrms             |
| Reference voltage temperature coefficient     | $TC_{RF}$ | 100K $\Omega$ resister<br>Between VRH<br>0 $^{\circ}$ C < TA < 70 $^{\circ}$ C | —    | —    | 50  | ppm/ $^{\circ}$ C |
| Capacitance measurement Accuracy <sup>5</sup> |           | 6nF – 60mF   | -2.5 | —    | 2.5 | %F.S              |
|   |           |  | -30  | —    | 30  | counts            |

Note:


1. Full Scale (60000 counts for SADC and 600 counts for FADC)
2. SADC = High resolution ADC (slow speed)
3. FADC = High speed ADC (lower resolution)
4. ES51998 built-in 3<sup>rd</sup> order low pass filter available for AC mode
5. Gain calibration is necessary for higher accuracy



AC electrical characteristics

| Parameter                   | Symbol       | Min. | Typ. | Max. | Unit |
|-----------------------------|--------------|------|------|------|------|
| SCLK clock frequency        | $f_{SCLK}$   | -    | -    | 100  | kHz  |
| SCLK clock time "L"         | $t_{LOW}$    | 4.7  | -    | -    | us   |
| SCLK clock time "H"         | $t_{HIGH}$   | 4.0  | -    | -    |      |
| SDATA output delay time     | $t_{AA}$     | 0.1  | -    | 3.5  | ns   |
| SDATA output hold time      | $t_{DH}$     | 100  | -    | -    |      |
| Start condition setup time  | $t_{SU.STA}$ | 4.7  | -    | -    | us   |
| Start condition hold time   | $t_{HD.STA}$ | 4.0  | -    | -    |      |
| Data input setup time       | $t_{SU.DAT}$ | 200  | -    | -    | ns   |
| Data input hold time        | $t_{HD.DAT}$ | 0    | -    | -    |      |
| Stop condition setup time   | $t_{SU.STO}$ | 4.7  | -    | -    | us   |
| SCLK/SDATA rising time      | $t_R$        | -    | -    | 1.0  |      |
| SCLK/SDATA falling time     | $t_F$        | -    | -    | 0.3  |      |
| Bus release time            | $t_{BUF}$    | 4.7  | -    | -    |      |
| EOC setup time in read mode | $t_{SU.EOC}$ | 0    | -    | -    | ns   |
| EOC hold time in read mode  | $t_{HD.EOC}$ | 0    | -    | -    | ns   |

MPU I/O timing diagram

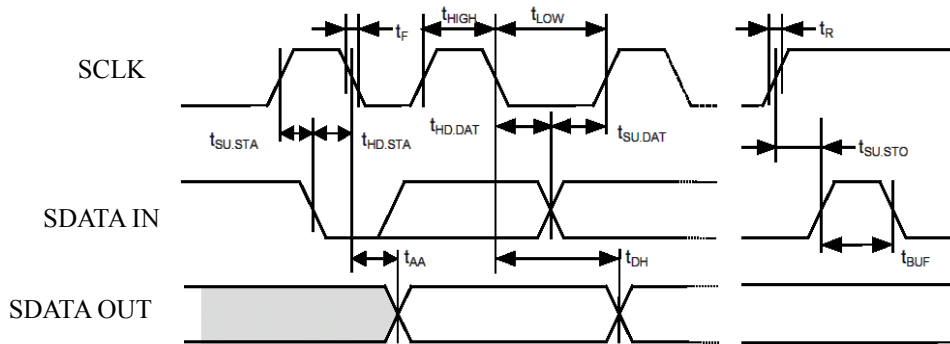



## Function Description

### 1. MPU serial I/O function overview


#### 1.1 Introduction

ES51998 configures a 3-wire serial I/O interface to external microprocessor unit (MPU). The SDATA pin is bi-directional and SCLK & DATA\_NEW are unilateral. The SDATA pin is configured by open-drain circuit design. The DATA\_NEW is used to check the data buffer of ADC ready or not. When the ADC conversion cycle is finished, the DATA\_NEW pin will be pulled high until MPU send a valid read command to ES51998. After the first ID byte is confirmed, the DATA\_NEW will be driven to low until the next ADC conversion finished again.

The data communication protocol is shown below. The write protocol is configured by an ID byte with four command bytes. The read protocol is configured by an ID byte with ten data bytes.



#### Write command:

ID byte, Write control byte1, Write control byte2, Write control byte3, Write control byte4

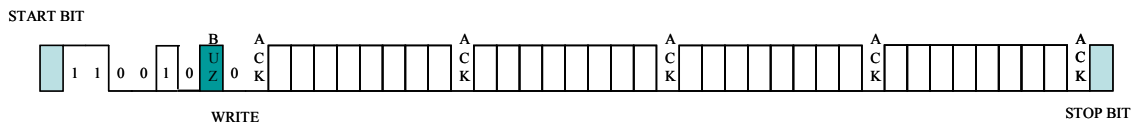

#### Read command:


ID byte, Read data byte1, Read data byte2 ~ Read data byte9, Read data byte10

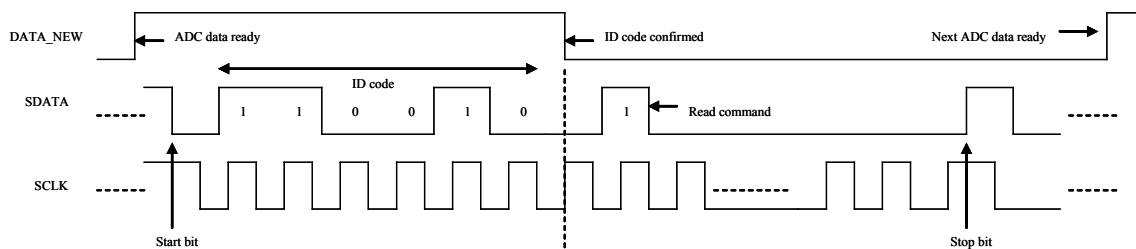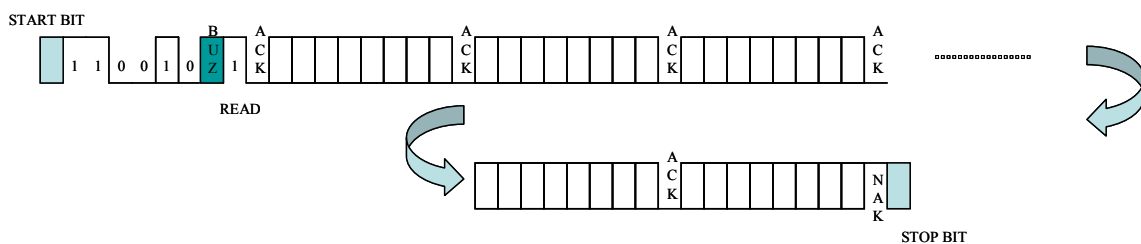





The ID byte of ES51998 is header of “110010” followed by a buzzer on/off control bit and R/W bit. The start/stop bit definition is shown on the diagram below.

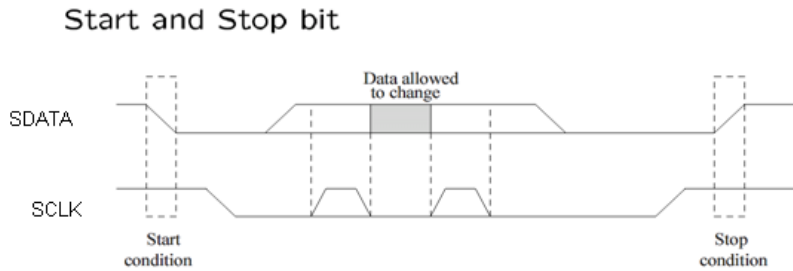

## 1.2 Read/Write command description

The write command includes one ID byte with four command bytes. If the valid write ID code is received by ES51998 at any time, the write command operation will be enabled.

The next table shows the content of write command.

| Byte | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0    |
|------|------|------|------|------|------|------|------|---------|
| ID   | 1    | 1    | 0    | 0    | 1    | 0    | BUZ  | R/W=0   |
| W1   | SHBP | F3   | F2   | F1   | F0   | Q2   | Q1   | Q0      |
| W2   | B0   | B1   | B2   | 0    | 0    | FQ2  | FQ1  | FQ0     |
| W3   | AC   | 0    | 0    | EXT  | 0    | LPF1 | LPF0 | RP      |
| W4   | PEAK | PCAL | IRQ  | IRV  | IRR  | OP0  | OP1  | EXT ADP |

Auxiliary low-resistance detection control bit for Continuity and Diode modes: **SHBP**

Measurement function control bit: **F3/F2/F1/F0**

Range control bit for V/A/R/C modes: **Q2/Q1/Q0**

Range control bit for Freq mode: **FQ2/FQ1/FQ0**

Buzzer frequency selection: **B2/B1/B0**

Buzzer driver ON/OFF control bit: **BUZ**

AC mode control enable bit: **AC**

PEAK/Calibration mode enable bit: **PEAK/PCAL**

3dB BW for low-pass-filter selection: **LPF1/LPF0**

External source for Diode mode control bit: **EXT**

OP configuration control bit: **OP1/OP0**

Frequency mode input resistance control bit or conductance mode control bit: **RP**

ADP mode control bit: **EXT\_ADP**

Insulation mode control bit: **IRQ/IRV/IRR**



The read command includes one ID byte with ten data bytes. When DATA\_NEW is ready<sup>1</sup>, MPU could send the read data command to get the result of ADC conversion (D0/D1/D2/D3)<sup>2</sup> or status flag from ES51998.

The next table shows the content of read command.

| Byte | Bit7  | Bit6  | Bit5  | Bit4  | Bit3  | Bit2  | Bit1  | Bit0  |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| ID   | 1     | 1     | 0     | 0     | 1     | 0     | BUZ   | R/W=1 |
| R1   | ASIGN | BSIGN | PMAX  | PMIN  | BTS0  | BTS1  | STA0  | ALARM |
| R2   | HF    | LF    | LDUTY | STA1  | F FIN | D0:0  | D0:1  | D0:2  |
| R3   | D0:3  | D0:4  | D0:5  | D0:6  | D0:7  | D0:8  | D0:9  | D0:10 |
| R4   | D0:11 | D0:12 | D0:13 | D0:14 | D0:15 | D0:16 | D0:17 | D0:18 |
| R5   | D1:0  | D1:1  | D1:2  | D1:3  | D1:4  | D1:5  | D1:6  | D1:7  |
| R6   | D1:8  | D1:9  | D2:0  | D2:1  | D2:2  | D2:3  | D2:4  | D2:5  |
| R7   | D2:6  | D2:7  | D2:8  | D2:9  | D2:10 | D2:11 | D2:12 | D2:13 |
| R8   | D2:14 | D2:15 | D2:16 | D2:17 | D2:18 | D3:0  | D3:1  | D3:2  |
| R9   | D3:3  | D3:4  | D3:5  | D3:6  | D3:7  | D3:8  | D3:9  | D3:10 |
| R10  | D3:11 | D3:12 | D3:13 | D3:14 | D3:15 | D3:16 | D3:17 | D3:18 |

<sup>1</sup>Note: DATA\_NEW will be active with D1 data updated when one fast ADC (FADC) conversion finished. If MCU access slow ADC output only, ten FADC conversion cycle delay is necessary. DATA\_NEW for frequency or capacitance mode will be active when D0 or D3 data ready.

<sup>2</sup>Note: D0/D1/D2/D3 all are binary code format. D0 is SADC output and D1 is FADC output. The maximum data is 63000 counts for SADC and 604 counts for FADC. The maximum counts for PEAK mode is 103000, so D0 bit 17-18 could be ignored..

The ADC data output for measurement mode: **F3/F2/F1/F0**


| F3 | F2 | F1 | F0 | Measurement mode | Read data bytes                        |
|----|----|----|----|------------------|--|
| 0  | 0  | 0  | 0  | V mode           | D0(0:18), D1(0:9)                      |
| 0  | 0  | 0  | 1  | ACV + Hz(%) mode | D0(0:18), D1(0:9), D3(0:18)            |
| 0  | 0  | 1  | 0  | A mode           | D0(0:18), D1(0:9)                      |
| 0  | 0  | 1  | 1  | ACA + Hz(%) mode | D0(0:18), D1(0:9), D2(0:18), D3(0:18)  |
| 0  | 1  | 0  | 0  | Resistance mode  | D0(0:18), D1(0:9)                      |
| 0  | 1  | 0  | 1  | Continuity mode  | D0(0:18), D1(0:9)                      |
| 0  | 1  | 1  | 0  | Diode mode       | D0(0:18), D1(0:9)                      |
| 0  | 1  | 1  | 1  | F + duty mode    | D0(0:18), D2(0:18), D2(0:18), D3(0:18) |
| 1  | 0  | 0  | 0  | Capacitance Mode | D0(0:18)                               |
| 1  | 0  | 0  | 1  | ADP mode         | D0(0:18), D1(0:9)                      |
| 1  | 0  | 1  | 0  | ADP + Hz(%) mode | D0(0:18), D1(0:9), D2(0:18), D3(0:18)  |
| 1  | 1  | 1  | 1  | Insulation mode  | D0(0:18)                               |



Buzzer frequency selection: **B2/B1/B0**

| B2 | B1 | B0 | Buzzer frequency |
|----|----|----|------------------|
| 0  | 0  | 0  | 1.00kHz          |
| 0  | 0  | 1  | 1.33kHz          |
| 0  | 1  | 0  | 2.00kHz          |
| 0  | 1  | 1  | 2.22kHz          |
| 1  | 0  | 0  | 2.67kHz          |
| 1  | 0  | 1  | 3.08kHz          |
| 1  | 1  | 0  | 3.33kHz          |
| 1  | 1  | 1  | 4.00kHz          |

Set B2-B0 properly to get the target frequency. Use **BUZ** control bit to enable/disable the *BUZOUT* (pin82) driver output. If MPU control BUZ only, it is available to set ID byte with ending of stop bit.

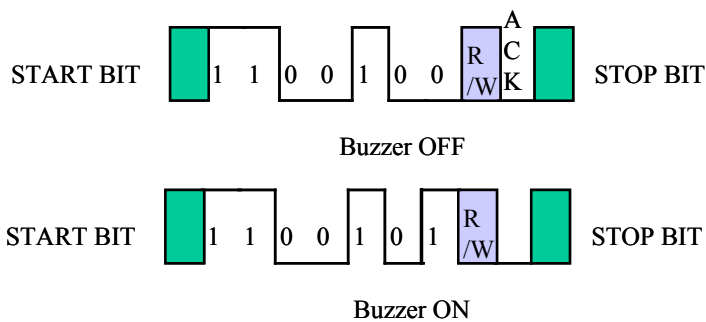



Status flags for measurement mode: ● = function available

| Measurement mode | ASIGN | BSIGN | PMAX  | PMIN | BTS0 | BTS1  | ALARM |
|------------------|-------|-------|-------|------|------|-------|-------|
| V mode           | ●     | ●     | ●     | ●    | ●    | ●     | ●     |
| ACV + Hz mode    |       |       | ●     | ●    | ●    | ●     | ●     |
| A mode           | ●     | ●     | ●     | ●    | ●    | ●     | ●     |
| ACA + Hz mode    |       |       | ●     | ●    | ●    | ●     | ●     |
| Res. mode        |       |       |       |      | ●    | ●     |       |
| Cont. mode       |       |       |       |      | ●    | ●     |       |
| Diode mode       | ●     | ●     |       |      | ●    | ●     |       |
| F + duty mode    |       |       |       |      | ●    | ●     |       |
| Cap. Mode        |       |       |       |      | ●    | ●     | ●     |
| ADP mode         | ●     | ●     | ●     | ●    | ●    | ●     |       |
| ADP + Hz mode    |       |       | ●     | ●    | ●    | ●     |       |
| Insulation mode  | ●     |       |       |      | ●    | ●     |       |
| Measurement mode | HF    | LF    | LDUTY | STA0 | STA1 | F_FIN |       |
| V mode           |       |       |       |      |      |       |       |
| V + Hz mode      | ●     | ●     |       | ●    | ●    | ●     |       |
| A mode           |       |       |       |      |      |       |       |
| A + Hz mode      | ●     | ●     |       | ●    | ●    | ●     |       |
| Res. mode        |       |       |       |      | ●    |       |       |
| Cont. mode       |       |       |       |      |      |       |       |
| Diode mode       |       |       |       |      |      |       |       |
| F + duty mode    | ●     | ●     | ●     | ●    | ●    | ●     |       |
| Cap. Mode        |       |       |       | ●    |      |       |       |
| ADP mode         |       |       |       |      |      |       |       |
| ADP + Hz mode    | ●     | ●     |       | ●    | ●    | ●     |       |
| Insulation mode  |       |       |       |      | ●    |       |       |

Description of status flags:

ASIGN: Sign bit of SADC output (-1 \* D0 if ASIGN=1)

BSIGN: Sign bit of FADC output (-1 \* D1 if BSIGN=1)

PMAX: Indicates D0 output is the voltage of the peak maximum capacitor (pin62)

PMIN: Indicates D0 output is the voltage of the peak minimum capacitor (pin61)

BTS0/BTS1: Multi-level battery voltage indication

ALARM: Large capacitor indication/High crest factor signal detection in ACV mode

HF: Higher frequency indication for Hz mode

LF: Lower frequency indication for Hz mode

LDUTY: Low duty indication for Hz + duty mode

STA0/STA1: divider indication for Hz mode

STA0: Status flag for capacitor discharging mode


STA1: Status flag for Insulation R mode/Resistance mode

F\_FIN: Measurement cycle finished for Hz mode



### 1.3 Power & I/O level selection

The ES51998 provide a flexible I/O level setting for different MPU system configuration. The uP\_VCC should be connected to the same potential of external Vcc of MCU. The uP\_VCC is allowed to be set between DGND ~ V+. The IO\_CTRL pin selects the Vss level of MCU. If IO\_CTRL is set to DGND, the Vss level of MCU is the same as DGND. If IO\_CTRL is set to V-, the Vss level of MCU is the same as V-.

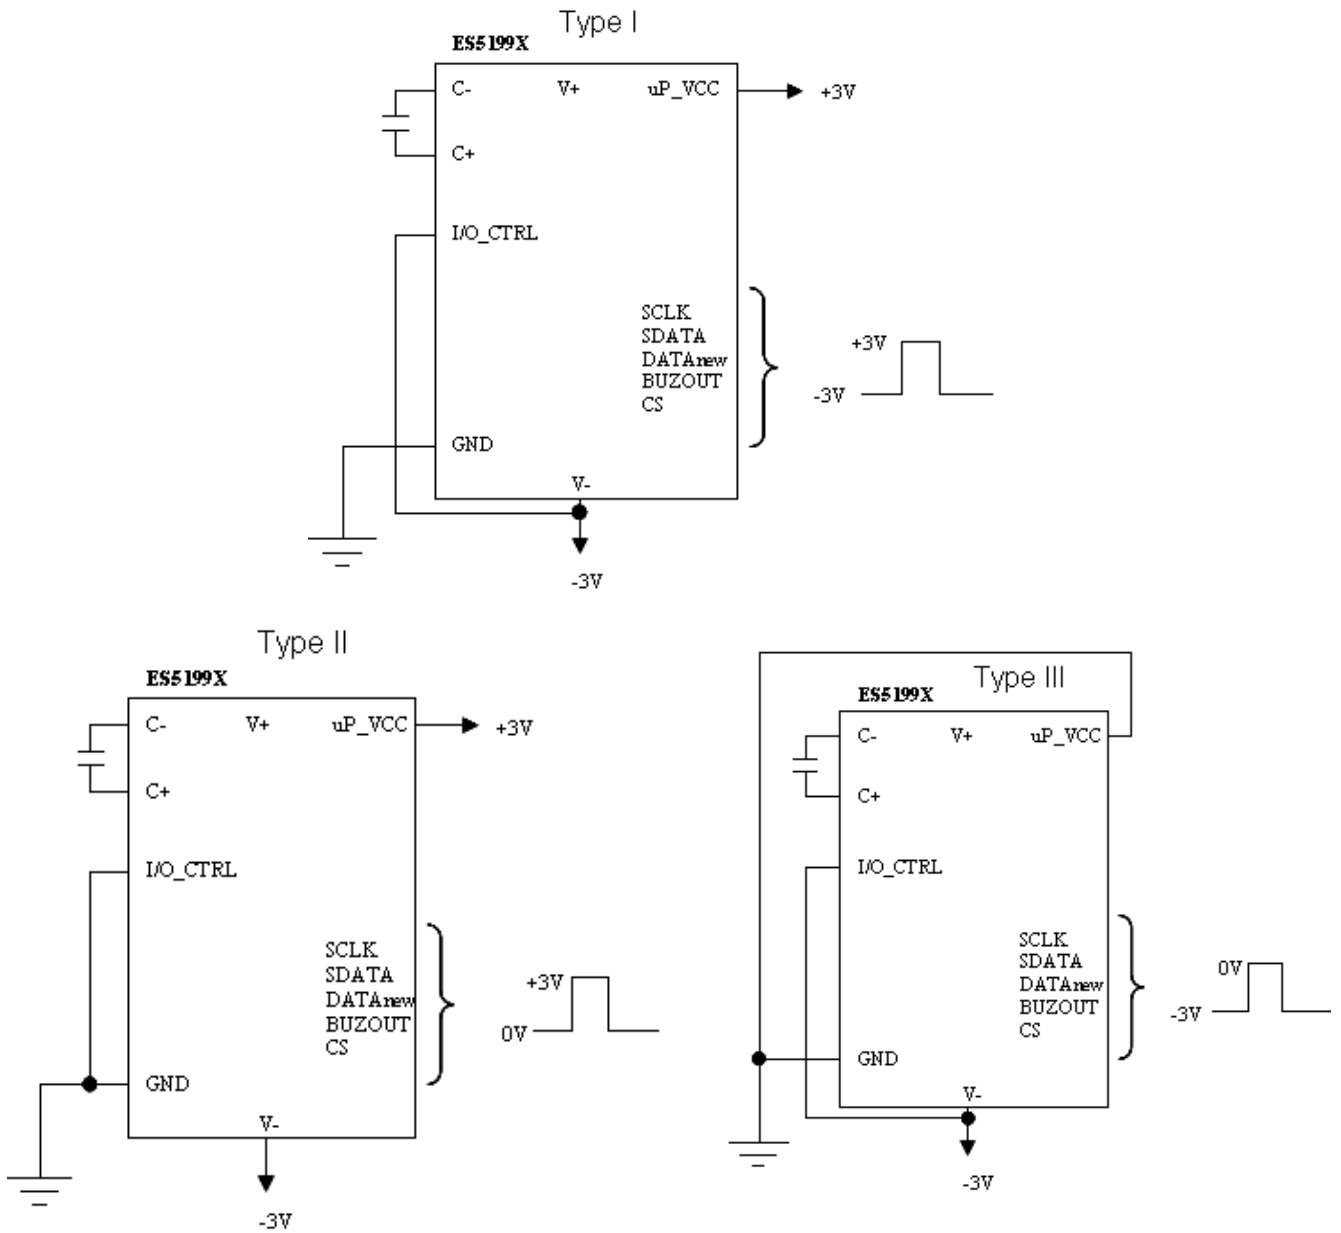



## 2. Operating Modes

### 2.1. Voltage Measurement

MPU send write command to select the voltage measurement function. The Hz mode measurement is available to be enabled with the ACV function (set AC bit to 1) simultaneously. The measured signal is applied to *VR1* terminal (pin25) through 10MΩ.

See the next table of function command:

| F3 | F2 | F1 | F0 | AC | Measurement mode | Read data bytes                       |
|----|----|----|----|----|------------------|---------------------------------------|
| 0  | 0  | 0  | 0  | 0  | DCV mode         | D0(0:18), D1(0:9)                     |
| 0  | 0  | 0  | 0  | 1  | ACV mode         | D0(0:18), D1(0:9)                     |
| 0  | 0  | 0  | 1  | 1  | ACV + Hz(%) mode | D0(0:18), D1(0:9), D2(0:18), D3(0:18) |

**Note1:** D0/D1/D3 all are binary format. ASIGN/BSIGN are the sign bit of D0/D1, respectively.

**Note2:** See PEAK mode (section 2.10) also.

Range control for voltage mode (ACV/DCV)

| Q2 | Q1 | Q0 | Full Scale Range | Divider Ratio | Resister Connection |
|----|----|----|------------------|---------------|---------------------|
| 0  | 0  | 0  | 600.00mV         | 1             | VR1 (10MΩ)          |
| 0  | 0  | 1  | 6.0000V          | 1/10          | VR2 (1.111MΩ)       |
| 0  | 1  | 0  | 60.000V          | 1/100         | VR3 (101kΩ)         |
| 0  | 1  | 1  | 600.00V          | 1/1000        | VR4 (10.01kΩ)       |
| 1  | 0  | 0  | 1000.0V          | 1/10000       | VR5 (1kΩ)           |

Frequency range control for ACV+Hz(%) mode

| FQ2        | FQ1 | FQ0 | Full Scale Range |
|------------|-----|-----|------------------|
| 0          | 0   | 0   | 60.00Hz          |
| 0          | 0   | 1   | 600.0Hz          |
| 0          | 1   | 0   | 6.000kHz         |
| 0          | 1   | 1   | 60.00kHz         |
| Duty Cycle |     |     | 20% ~ 80%        |

**Note:** See frequency mode (section 2.8) also

ALARM bit at voltage mode is used for high crest factor (HCF) signal detection. If MPU check the ALARM status flag active when data and range are stable, it should consider the making the existing range up to avoid the signal clamping saturation caused by HCF signal. There is higher peak voltage with lower RMS value for HCF signal. So if the range is up according to the ALARM bit, MCU should set the lower under-limit counts temporarily to avoid the ranging unstable for this case.



## 2.2 Current measurement

MPU send write command to select the current measurement function. The Hz mode measurement is available to be enabled with the ACA function (set AC bit to 1) simultaneously. The measured signal is applied to *IVSL/IVSH* terminals (pin37-38).

See the next table of function command:

| F3 | F2 | F1 | F0 | AC | Measurement mode | Read data bytes                       |
|----|----|----|----|----|------------------|---------------------------------------|
| 0  | 0  | 1  | 0  | 0  | DCA mode         | D0(0:18), D1(0:9)                     |
| 0  | 0  | 1  | 0  | 1  | ACA mode         | D0(0:18), D1(0:9)                     |
| 0  | 0  | 1  | 1  | 1  | ACA + Hz(%) mode | D0(0:18), D1(0:9), D2(0:18), D3(0:18) |



Note1: D0/D1/D3 all are binary format. ASIGN/BSIGN are the sign bit of D0/D1, respectively.

Note2: See PEAK mode (section 2.10) also.

Range control for current mode (ACA/DCA)

| Q2 | Q1 | Q0 | Full Scale Range    | Input terminal |
|----|----|----|---------------------|----------------|
| 0  | 0  | 0  | 300mV → 60000counts | IVSL           |
| 0  | 0  | 1  | 300mV → 60000counts | IVSH           |

Current measurement mode configuration examples: (max. voltage drop 300mV)

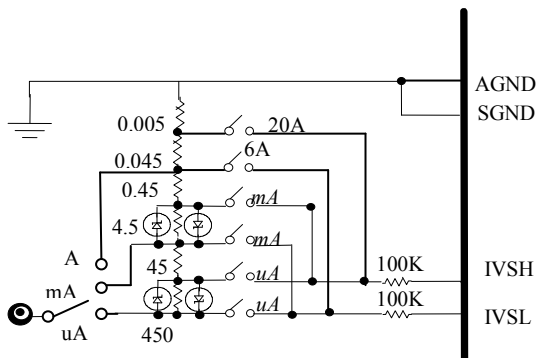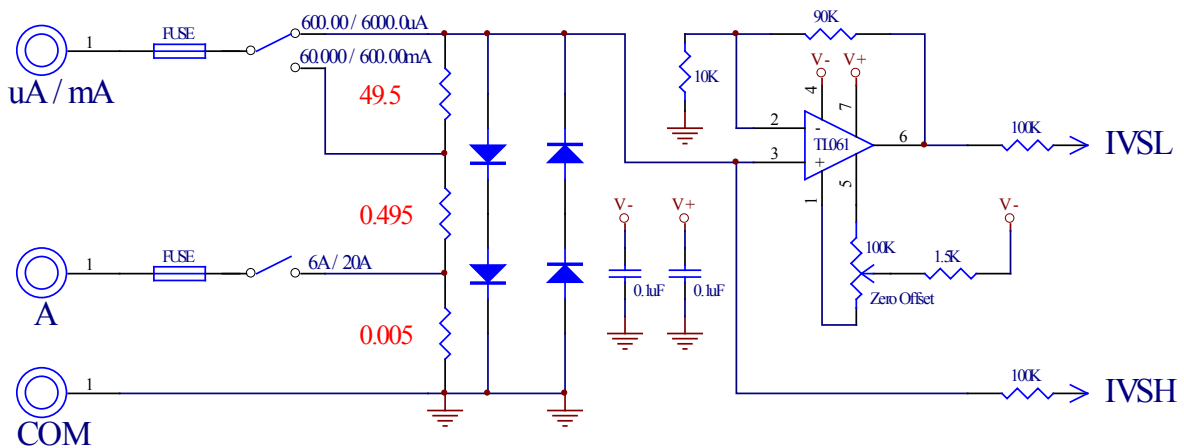

(max voltage drop = ~ 1V)

Frequency range control for ACA+Hz(%) mode

| FQ2        | FQ1 | FQ0 | Full Scale Range |
|------------|-----|-----|------------------|
| 0          | 0   | 0   | 60.00Hz          |
| 0          | 0   | 1   | 600.0Hz          |
| 0          | 1   | 0   | 6.000kHz         |
| 0          | 1   | 1   | 60.00kHz         |
| Duty Cycle |     |     | 20% ~ 80%        |

Note: See frequency mode (section 2.8) also.

### 2.3 Low pass filter (LPF) mode for ACA/ACV mode

A 3<sup>rd</sup> order low pass filter with is built in ES51998. The 3dB bandwidth of the low pass filter could be selectable by MPU. The LPF mode is active when the LPF control bit is set to be active. When PEAK mode is active, the LPF mode will be disabled temporarily until the PEAK mode is cancelled.

The LPF mode is allowed to be enabled in F + duty mode to reject high-frequency noise for sine wave input, but the 3dB will be fixed at 10kHz only.

| LPF1 | LPF0 | Low pass filter effect |
|------|------|------------------------|
| 0    | 0    | Disable                |
| 0    | 1    | 3dB = 1kHz             |
| 1    | 0    | 3dB = 10kHz            |
| 1    | 1    | 3dB > 100kHz           |

### 2.4 Resistance/Conductance Measurement

MPU send write command to select the resistance measurement function. When RP=1, the command to select the conductance mode.

| F3 | F2 | F1 | F0 | Measurement mode | Read data bytes   |
|----|----|----|----|------------------|-------------------|
| 0  | 1  | 0  | 0  | Resistance mode  | D0(0:18), D1(0:9) |

Note1: D0/D1 both are binary format. ASIGN/BSIGN bits are ignored. When RP=1, the D1 data should be ignored.

Range control for resistance mode (RP=0)

| Q2 | Q1 | Q0 | Full Scale Range | Relative Resistor | Equivalent value |
|----|----|----|------------------|-------------------|------------------|
| 0  | 0  | 0  | 600.00Ω          | OR1               | 100Ω             |
| 0  | 0  | 1  | 6.0000KΩ         | VR5               | 1KΩ              |
| 0  | 1  | 0  | 60.000KΩ         | VR4    VR1        | 10KΩ             |
| 0  | 1  | 1  | 600.00KΩ         | VR3    VR1        | 100KΩ            |
| 1  | 0  | 0  | 6.0000MΩ         | VR2    VR1        | 1MΩ              |
| 1  | 0  | 1  | 60.000MΩ         | VR1               | 10MΩ             |






Set **RP=1** when range control is 10MΩ range, the conductance mode is available. The status **STA1** bit is used for converted data indication of reference voltage or input voltage.

| Q2 | Q1 | Q0 | Full Scale Range | Relative Resistor | Equivalent value |
|----|----|----|------------------|-------------------|------------------|
| 1  | 0  | 1  | 60.00nS          | VR1               | 10MΩ             |

The maximum displayed count is 6000 and the resolution should be 0.01nS. The MCU should check the status bit **STA1** and **D0** simultaneously. When **STA1=1** the **D0** data should be  $V_{D1}$ . If **STA1=0**, then the **D0** data should be  $V_{D2}$ . The DUT conductance value could be calculated by simple formula.

### Conductance mode 60.00nS

$$G_x = V_{D1}/V_{D2} * 10000$$

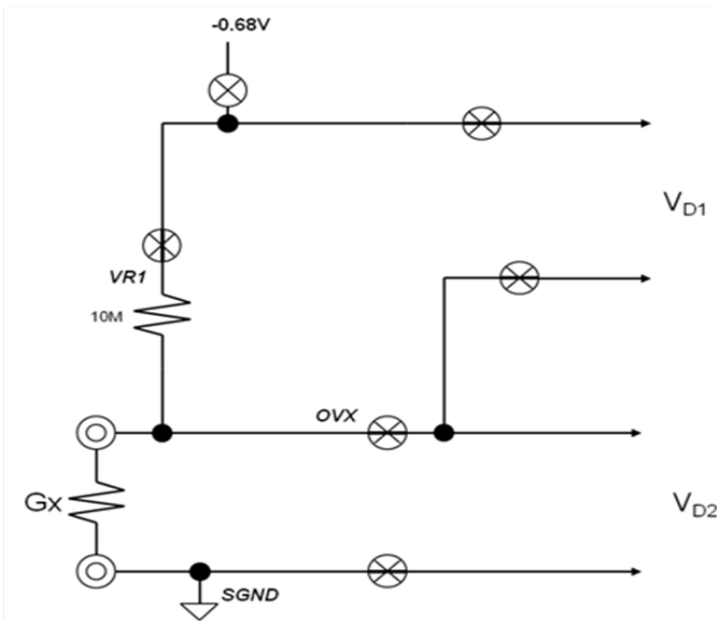

## 2.5 Capacitance Measurement

MPU send write command to select the capacitance measurement function.

| F3 | F2 | F1 | F0 | Measurement mode | Read data bytes |
|----|----|----|----|------------------|-----------------|
| 1  | 0  | 0  | 0  | Capacitance mode | D0(0:18)        |

**Note1: D0 is binary format. ASIGN bit is ignored.**

Range control for capacitance mode

| Q2 | Q1 | Q0 | Full Scale Range | Relative Resistor | Measurement Period |
|----|----|----|------------------|-------------------|--------------------|
| 0  | 0  | 0  | 6.0000nF*        | -                 | 0.5 sec            |
| 0  | 0  | 1  | 60.000nF*        | OVX pin VR        | 0.5 sec            |
| 0  | 1  | 0  | 600.00nF*        | -                 | 1.25 sec           |
| 0  | 1  | 1  | 6.0000uF*        | R9K / R1K         | 0.4 sec max.       |
| 1  | 0  | 0  | 60.000uF*        | R9K / R1K         | 0.5 sec max.       |
| 1  | 0  | 1  | 600.00uF*        | R9K / R1K         | 1.0 sec max.       |
| 1  | 1  | 0  | 6.0000mF*        | R9K / R1K         | 1.35 sec max.      |
| 1  | 1  | 1  | 60.000mF*        | R9K / R1K         | 6.75 sec max.      |

- The displayed counts in ES51998 capacitance mode is recommended to be divided by 10. (6000 counts displayed is recommended)
- ALARM bit at capacitance mode is used for increasing the ranging speed. If MPU check the ALARM=1 at lower range, it could set the next range to 6.000uF directly and the ADC output should be ignored.
- STA0 status bit is used for detection of DUT capacitor voltage. If STA0=1, the internal capacitor discharging mode is active and the capacitance measurement is inhibited. It is recommended to discharge the DUT capacitor externally.

## 2.6 Continuity Check measurement

MPU send write command to select the continuity measurement function.

| F3 | F2 | F1 | F0 | Measurement mode | Read data bytes   |
|----|----|----|----|------------------|-------------------|
| 0  | 1  | 0  | 1  | Continuity mode  | D0(0:18), D1(0:9) |

**Note1: D0/D1 both are binary format. ASIGN/BSIGN bits both are ignored.**

Continuity mode shares the same configuration with 600.00Ω resistance measurement circuit and support the low-resistance detection. If the *STBEEP* output (pin64) is low, it means the low-resistance status is detected (It means the *OVX* terminal voltage less than -7mV). It could be faster than the FADC result, so MPU could monitor the *STBEEP* output and FADC (D1) data output make the high speed detection for short circuit detection. Set *SHBP*=1 to enable the built-in buzzer driving automatically when *STBEEP* is active.



## 2.7 Diode Measurement


MPU send write command to select the diode measurement function.

| F3 | F2 | F1 | F0 | Measurement mode | Read data bytes   |
|----|----|----|----|------------------|-------------------|
| 0  | 1  | 1  | 0  | Diode mode       | D0(0:18), D1(0:9) |

Note1: D0/D1 both are binary format. ASIGN/BSIGN are the sign bit of D0/D1, respectively.

Diode measurement mode shares the same configuration with 6.0000V voltage measurement circuit and support the low-resistance detection. If the *STBEEP* output (pin64) is low, it means the low-resistance status is detected (It means the *OVX* terminal voltage less than 9mV). It could be faster than the FADC result, so MPU could monitor the *STBEEP* output and FADC (D1) data output make the high speed detection for short circuit detection. Set *SHBP*=1 to enable the built-in buzzer driving automatically when *STBEEP* is active. The default source voltage at diode mode is the same as *V+* potential. MPU could set the control bit *EXT*=1 to change the source voltage to external source. The external voltage source (positive or negative) input applied from *EXTSRC* (pin16). The available external source range should be from *V+* to *V-*.

### DIODE mode configuration

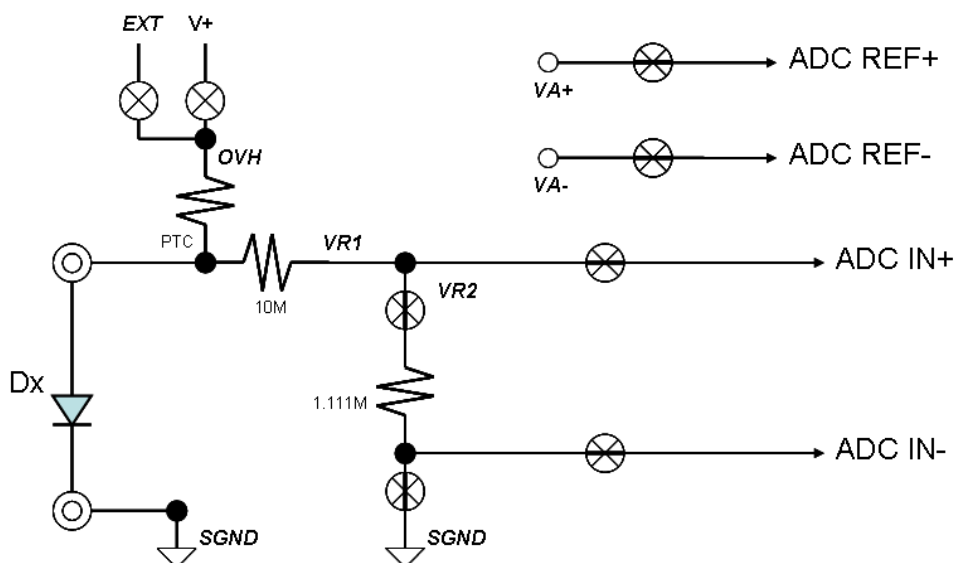



## 2.8 Frequency/duty cycle mode measurement

The default typical input impedance of frequency with duty cycle mode is 1MΩ. The MPU could set control bit **RP**=1 to change the input impedance down to 100kΩ. MPU send write command to select the frequency/duty cycle measurement function.

| F3 | F2 | F1 | F0 | Measurement mode | Read data bytes              |
|----|----|----|----|------------------|------------------------------|
| 0  | 1  | 1  | 1  | Hz + Duty mode   | D0(0:18), D2(0:18), D3(0:18) |

**Note1:** D0/D2/D3 all are binary format. ASIGN bit is ignored.

**Note2:** Set LPF1 = 1 to enable the smooth function for sine wave input automatically

Range control for frequency mode

| FQ2 | FQ1 | FQ0 | Full Scale |
|-----|-----|-----|------------|
| 0   | 0   | 0   | 60.000Hz   |
| 0   | 0   | 1   | 600.00Hz   |
| 0   | 1   | 0   | 6.0000KHz  |
| 0   | 1   | 1   | 60.000KHz  |
| 1   | 0   | 0   | 600.00KHz  |
| 1   | 0   | 1   | 6.0000MHz  |
| 1   | 1   | 0   | 60.000MHz  |

Available minimum frequency input  $F_{MIN} = 4.000\text{Hz}$

Frequency & duty cycle mode computed by D0/D2/D3 (if F\_FIN=1)

| Flag<br>Range* | STA0=1             | STA0=0             |                       |
|----------------|--------------------|--------------------|-----------------------|
|                |                    | STA1=1             | STA1=0                |
| 60.000Hz       | FREQ=1000000000/D3 | FREQ=4000000000/D3 | FREQ=8000000000/D3    |
| 600.00Hz       | FREQ=100000000/D3  | FREQ=400000000/D3  | FREQ=1600000000/D3**  |
| 6.0000KHz      | FREQ=20000000/D3   | FREQ=320000000/D3  | FREQ=2560000000/D3*** |
| 60.000KHz      | FREQ=2000000/D3    | FREQ=256000000/D3  | FREQ=2048000000/D3    |
| 600.00KHz      | FREQ = D0-1        |                    |                       |
| 6.0000MHz      |                    |                    |                       |
| 60.000MHz      |                    |                    |                       |

\*Note: The Hz measurement of AC+Hz mode is recommended to support 6000 counts displayed

\*\*Note: If D3 < 40000, simple arithmetic mean is necessary to get the 0.01Hz resolution

\*\*\*Note: If D3 < 50000, simple arithmetic mean is necessary to get the 0.0001 KHz resolution



| Status Flag         | LDUTY=1           | LDUTY=0     |
|---------------------|-------------------|-------------|
| Duty cycle (<60kHz) | 10000-D2*10000/D3 | D2*10000/D3 |

The status flag F\_FIN indicate the frequency input signal available ( $> F_{MIN}$ ) or not. If the computed result less than  $F_{MIN}$ , the frequency/duty cycle readings should be set to zero.

The status flags HF & LF are used for fast judgment of proper range. If frequency input is larger than 7 kHz, HF will be active. If frequency input is floating or frequency detected too low, LF will be active.

**Auto range consideration for MPU by using Status Flags of frequency mode**

| Flag<br>Range                                    | F_FIN=0                                       | F_FIN=1                     | F_FIN=1                               |                                       |
|--|---|-----------------------------|---------------------------------------|---------------------------------------|
|  | LF=0  | LF=1*                       | HF=LF=0                               | HF=1**                                |
| 60.000Hz<br>600.00Hz<br>6.0000KHz                | Data and Range is not necessary to be updated | Hz/Duty=0                   | Change range depends on data computed | Set range to 60.000kHz range          |
| 60.000KHz<br>600.00KHz<br>6.0000MHz<br>60.000MHz |   | Set range to 60.000Hz range |                                       | Change range depends on data computed |

\*Note: LF=1 @ 60Hz range implies the frequency is not available to be measured. The Hz/Duty readings should be set to zero.

\*\*Note: When ACV+Hz/ACA+Hz/ADP+Hz mode is selected, the HF status should be ignored. Change range depends on data calculation result.

Duty cycle mode range (Input sensitivity  $> 2V_{pp}$  @ duty cycle = 5.0% & 95.0%)

| Freq. range          | Duty range*    |
|----------------------|----------------|
| 60.000Hz<br>600.00Hz | 5.0% - 95.0%   |
| 6.0000KHz            | 10.0 % - 90.0% |
| 60.000KHz            | 20.0% – 80.0%  |

\*Note: Duty range for AC+Hz(%) is 20% ~ 80%.



## 2.9 ADP mode

MPU send write command to select the ADP mode measurement function. The Hz mode measurement is available to be enabled with the ADP AC function (set AC bit to 1) simultaneously. The measured signal is applied to *ADP* terminal (pin39). The signal full scale is 600mV for DC mode and 600mVrms for AC mode.

See the next table of function command:

| F3 | F2 | F1 | F0 | AC | Measurement mode | Read data bytes                       |
|----|----|----|----|----|------------------|---------------------------------------|
| 1  | 0  | 0  | 1  | 0  | ADP DC mode      | D0(0:18), D1(0:9)                     |
| 1  | 0  | 0  | 1  | 1  | ADP AC mode      | D0(0:18), D1(0:9)                     |
| 1  | 0  | 1  | 0  | 1  | ADP + Hz(%) mode | D0(0:18), D1(0:9), D2(0:18), D3(0:18) |

**Note1:** D0/D1/D3 all are binary format. ASIGN/BSIGN are the sign bit of D0/D1, respectively.


**Note2:** See PEAK mode (section 2.10) also.

Frequency range control for ADP+Hz(%) mode

| FQ2        | FQ1 | FQ0 | Full Scale Range |
|------------|-----|-----|------------------|
| 0          | 0   | 0   | 60.00Hz          |
| 0          | 0   | 1   | 600.0Hz          |
| 0          | 1   | 0   | 6.000kHz         |
| 0          | 1   | 1   | 60.00kHz         |
| Duty Cycle |     |     | 20% ~ 80%        |

**Note:** See frequency mode (section 2.8) also

If MPU set the control bit **EXT\_ADAP**=1, the voltage on *EXTSRC* pin could be switched to *ADP* terminal internally. It is helpful for a voltage pulled application of ADP mode.

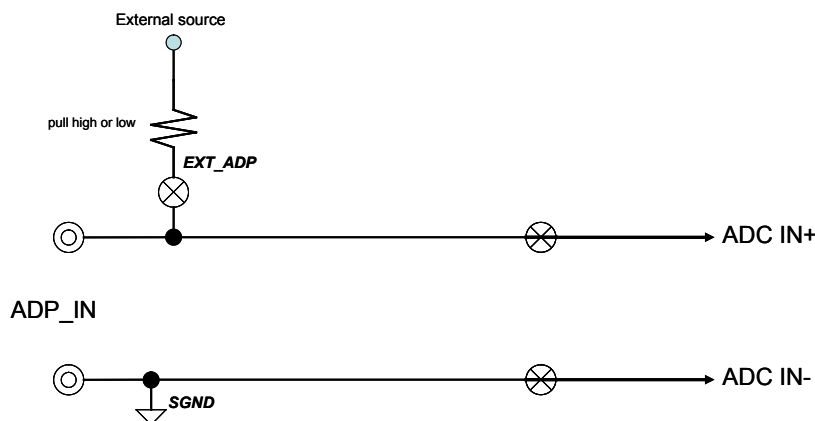



## 2.10 Peak-hold measurement mode

ES51998 provides a peak hold function to capture the real peak value for voltage or current measurement mode. In a case of a 1V sine wave input voltage, the peak hold function gets a maximum peak value of 1.414V and minimum peak value of -1.414V ideally. Set the control bit **PEAK=1** to force the ES51998 entering PEAK measurement mode. Peak Hold function is divided into two parts of peak maximum and peak minimum conversion. High resolution SADC performs peak maximum and peak minimum conversion in turn, not at the same time. The status flag P<sub>MAX</sub> or P<sub>MIN</sub> shows which type the peak value is. If P<sub>MAX</sub>=1(P<sub>MIN</sub>=1), the SADC output D0 is the conversion data on P<sub>MAX</sub> (P<sub>MIN</sub>) terminals (pin 61/62). The MPU should make the comparison procedure to get the maximum value of P<sub>MAX</sub> data and minimum value of P<sub>MIN</sub> data. The max counts for D0 is 103000.

### Peak calibration mode

At PEAK-Hold measurement mode, the offset voltage of internal operation amplifier will cause an error. To obtain a more accurate value, the offset error must be canceled. ES51998 provides the peak calibration feature to remove the influence on accuracy by internal offset voltage. Set the control bit **PCAL=1** to enter peak calibration mode. When PCAL mode is active, the SADC of ES51998 will output the calibration value of peak maximum and minimum conversion in turn. The offset values should be memorized respectively and deducted from the data of P<sub>MAX</sub>/P<sub>MIN</sub> at the normal peak measurement mode.

| Set PCAL=1 or PEAK=1 |  |  |
|----------------------|--|--|
| Status indication    | P <sub>MAX</sub> =1, P <sub>MIN</sub> =0 | P <sub>MAX</sub> =0, P <sub>MIN</sub> =1 |
| ADC data             | V <sub>P<sub>MAX</sub>.C</sub>           | V <sub>P<sub>MIN</sub>.C</sub>           |

V<sub>P<sub>MAX</sub>.C</sub> and V<sub>P<sub>MIN</sub>.C</sub> are not the real-time value of peak-hold voltage. They are the voltage stored on terminal capacitor (pin61-62). Because the capacitor will be self-discharging, so MCU need to compare the V<sub>P<sub>MAX</sub>.C</sub> & V<sub>P<sub>MIN</sub>.C</sub> respectively and memorize the maximum and minimum peak values in turn.



## 2.11 Insulation resistance measurement mode


The ES51998 is built-in analog switches network to support the insulation resistance measurement mode. By implementation of external high voltage source, the insulation resistance could be obtained from SADC output of ES51998 and calculated by microprocessor easily. The insulation mode is separated into two modes which are insulation V mode and insulation R mode which are described below.

### Insulation V mode configuration

| F3 | F2 | F1 | F0 | IRV | AC  | Measurement mode          | Read data bytes |
|----|----|----|----|-----|-----|---------------------------|-----------------|
| 1  | 1  | 1  | 1  | 1   | 0/1 | Insulation (DC/AC) V mode | D0(0:18)        |

Note1: D0 is binary format. ASIGN is the sign bit D0.

### Insulation V mode

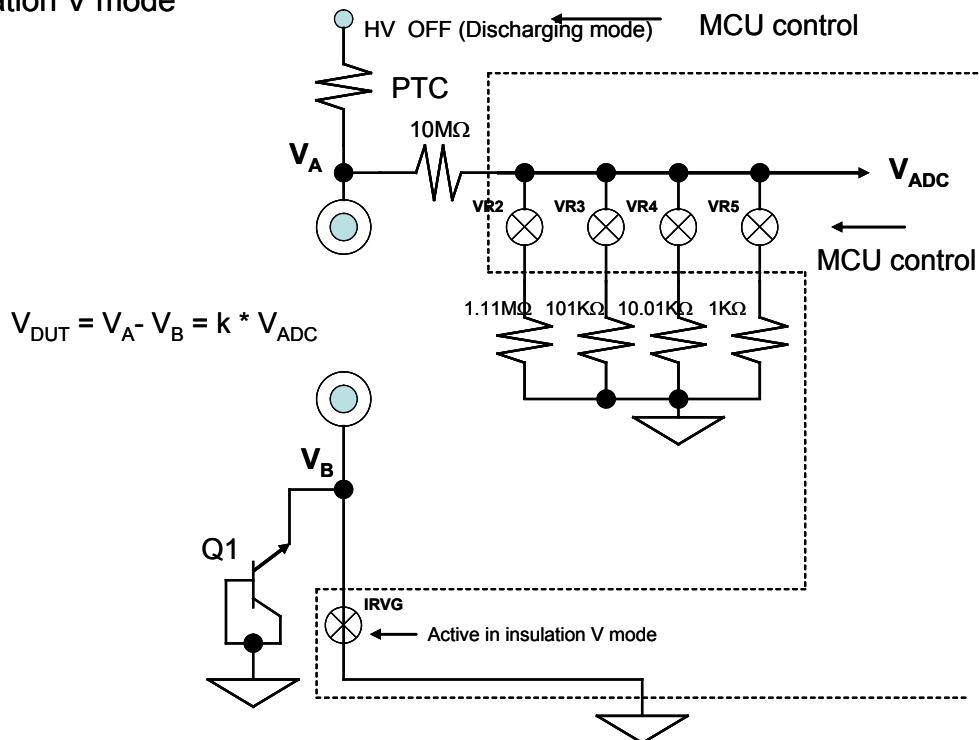

Note: The on-resistance of internal analog switches could be omitted.





Before measure insulation resistance, it is necessary to measure  $V_{DUT}$ . If  $V_{DUT}$  is too high, the resistance measurement should be forbidden. The insulation V mode is implemented by the same configuration with Voltage mode. The k factor of diagram is depended on the voltage range. During insulation V mode, an external fast discharging path should be applied on the HV sourcing part to release the high voltage charge on the DUT if it is capacitive load.

Range control for insulation V mode


| Q2 | Q1 | Q0 | Full Scale Range |
|----|----|----|------------------|
| 0  | 1  | 0  | 60.000V          |
| 0  | 1  | 1  | 600.00V          |
| 1  | 0  | 0  | 1000.0V          |

Note: 600mV – 6V ranges are omitted.

### Insulation R mode configuration

| F3 | F2 | F1 | F0 | IRV | IRR | Measurement mode  | Read data bytes |
|----|----|----|----|-----|-----|-------------------|-----------------|
| 1  | 1  | 1  | 1  | 0   | 1   | Insulation R mode | D0(0:18)        |

### Insulation R mode

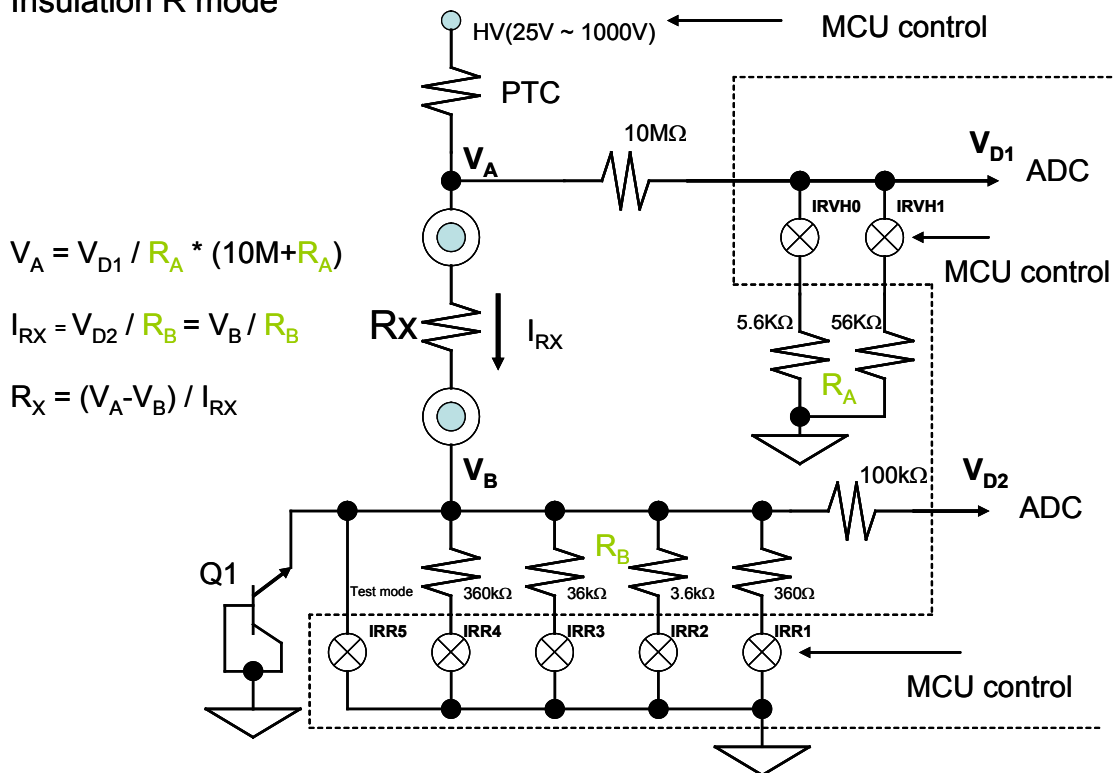

Note: ADC full scale is 600mV typically.



During insulation R mode is setting, the SADC of ES51966 will convert the DUT terminal voltage  $V_A$  (higher voltage side  $V_{D1}$ ) &  $V_B$  (lower voltage side  $V_{D2}$ ) sequentially. Use ohm's law calculation  $\{R_x = (V_A - V_B) / I_{RX}\}$  to get the target DUT insulation resistance easily. The microprocessor gets the ADC data by checking status bit **STA1**:

|                   |               |               |
|-------------------|---------------|---------------|
| Status indication | <b>STA1=1</b> | <b>STA1=0</b> |
| ADC data          | $V_{D1}$      | $V_{D2}$      |

The proper range control ( $R_A$  /  $R_B$  selection) depends on the HV source. The  $R_A$  selection is controlled by **IRQ** control bit. The  $R_B$  is selected by **Q2/Q1/Q0** control bits. The next range table is an example of HV sourcing from 25V to 1000V.

| $R_B \backslash R_A$ | Set <b>IRQ=1 (IRVH1)</b>             |                                      |                                      | Set <b>IRQ=0 (IRVH0)</b>             |                                      |                                      |
|----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|                      | HV=25V                               | HV=50V                               | HV=100V                              | HV=250V                              | HV=500V                              | HV=1000V                             |
| <i>IRR1</i>          | 15.0k $\Omega$ ~<br>150.0k $\Omega$  | 30.0k $\Omega$ ~<br>300.0k $\Omega$  | 60.0k $\Omega$ ~<br>600.0k $\Omega$  | 0.150M $\Omega$ ~<br>1.500M $\Omega$ | 0.300M $\Omega$ ~<br>3.000M $\Omega$ | 0.600M $\Omega$ ~<br>6.000M $\Omega$ |
| <i>IRR2</i>          | 0.150M $\Omega$ ~<br>1.500M $\Omega$ | 0.300M $\Omega$ ~<br>3.000M $\Omega$ | 0.600M $\Omega$ ~<br>6.000M $\Omega$ | 1.50M $\Omega$ ~<br>15.00M $\Omega$  | 3.00M $\Omega$ ~<br>30.00M $\Omega$  | 6.00M $\Omega$ ~<br>60.00M $\Omega$  |
| <i>IRR3</i>          | 1.50M $\Omega$ ~<br>15.00M $\Omega$  | 3.00M $\Omega$ ~<br>30.00M $\Omega$  | 6.00M $\Omega$ ~<br>60.00M $\Omega$  | 15.0M $\Omega$ ~<br>150.0M $\Omega$  | 30.0M $\Omega$ ~<br>300.0M $\Omega$  | 60.0M $\Omega$ ~<br>600.0M $\Omega$  |
| <i>IRR4</i>          | 15.0M $\Omega$ ~<br>150.0M $\Omega$  | 30.0M $\Omega$ ~<br>300.0M $\Omega$  | 60.0M $\Omega$ ~<br>600.0M $\Omega$  | 0.150G $\Omega$ ~<br>1.500G $\Omega$ | 0.300G $\Omega$ ~<br>3.000G $\Omega$ | 0.600G $\Omega$ ~<br>6.000G $\Omega$ |

| Q2 | Q1 | Q0 | $R_B$ range             | Best resolution* |
|----|----|----|-------------------------|------------------|
| 0  | 0  | 1  | <i>IRR1</i>             | 0.1k $\Omega$    |
| 0  | 1  | 0  | <i>IRR2</i>             | 1k $\Omega$      |
| 0  | 1  | 1  | <i>IRR3</i>             | 0.01M $\Omega$   |
| 1  | 0  | 0  | <i>IRR4</i>             | 0.1M $\Omega$    |
| 1  | 0  | 1  | <i>Test mode (IRR5)</i> | N/A              |

\*Note: The best resolution depends on the external high voltage and SADC readings.

## 2.12 Sleep

Set **CS** pin (pin 80) to logic low to make the ES51998 entering the sleep mode. The current consumption will be less than 3uA typically. Set **CS** pin to logic high or kept floating, the ES51998 will return to normal operation.




### 2.13 Multi-level battery voltage indication

The ES51998 is built-in a comparator for batter voltage indication. The voltage is applied to *LBAT* pin (pin 89) vs. *V-* terminal. MPU could check the status bit *BTS1/BTS0* and monitor the *LBAT* voltage status.


| Battery voltage             | BTS1 | BST0 |
|-----------------------------|------|------|
| $V_{LBT} > V_{t1}$          | 1    | 1    |
| $V_{t2} < V_{LBT} < V_{t1}$ | 1    | 0    |
| $V_{t3} < V_{LBT} < V_{t2}$ | 0    | 1    |
| $V_{LBT} < V_{t3}$          | 0    | 0    |

#### Low battery configuration for 9V/1.5V\*4/1.5V\*3 battery


Low battery test circuit (a)

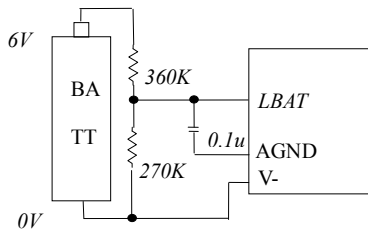

Low battery test circuit (b)

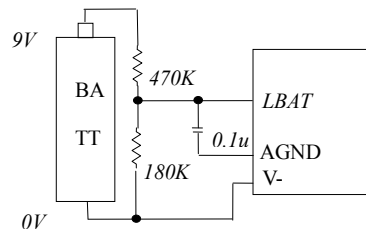

Low battery test circuit (c)

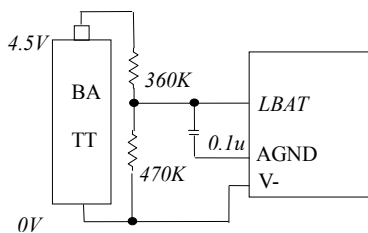




### 2.14 Independent OPAMP

ES51998 is built-in an independent OPAMP with 200kHz unity-gain bandwidth using for general purpose.

MPU could control the OP1/OP0 to change the OPAMP configuration:

| OP1 | OP0 | OPAMP configuration |
|-----|-----|---------------------|
| 0   | 0   | Normal              |
| 0   | 1   | OP disable          |
| 1   | 0   | Unity gain buffer   |
| 1   | 1   | Zero calibration    |


Independent OPAMP configuration

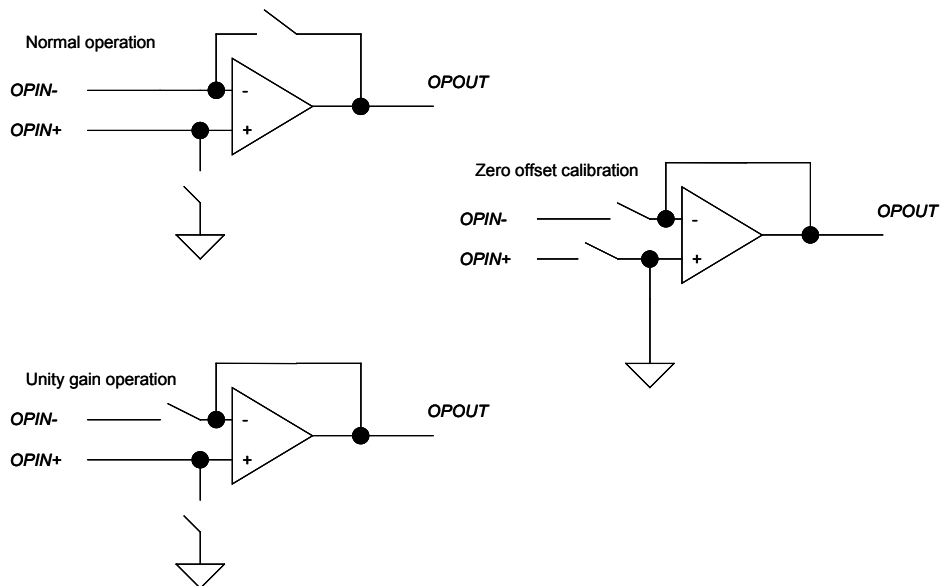




### 3. Application Circuit

#### 3.1 AVG circuit

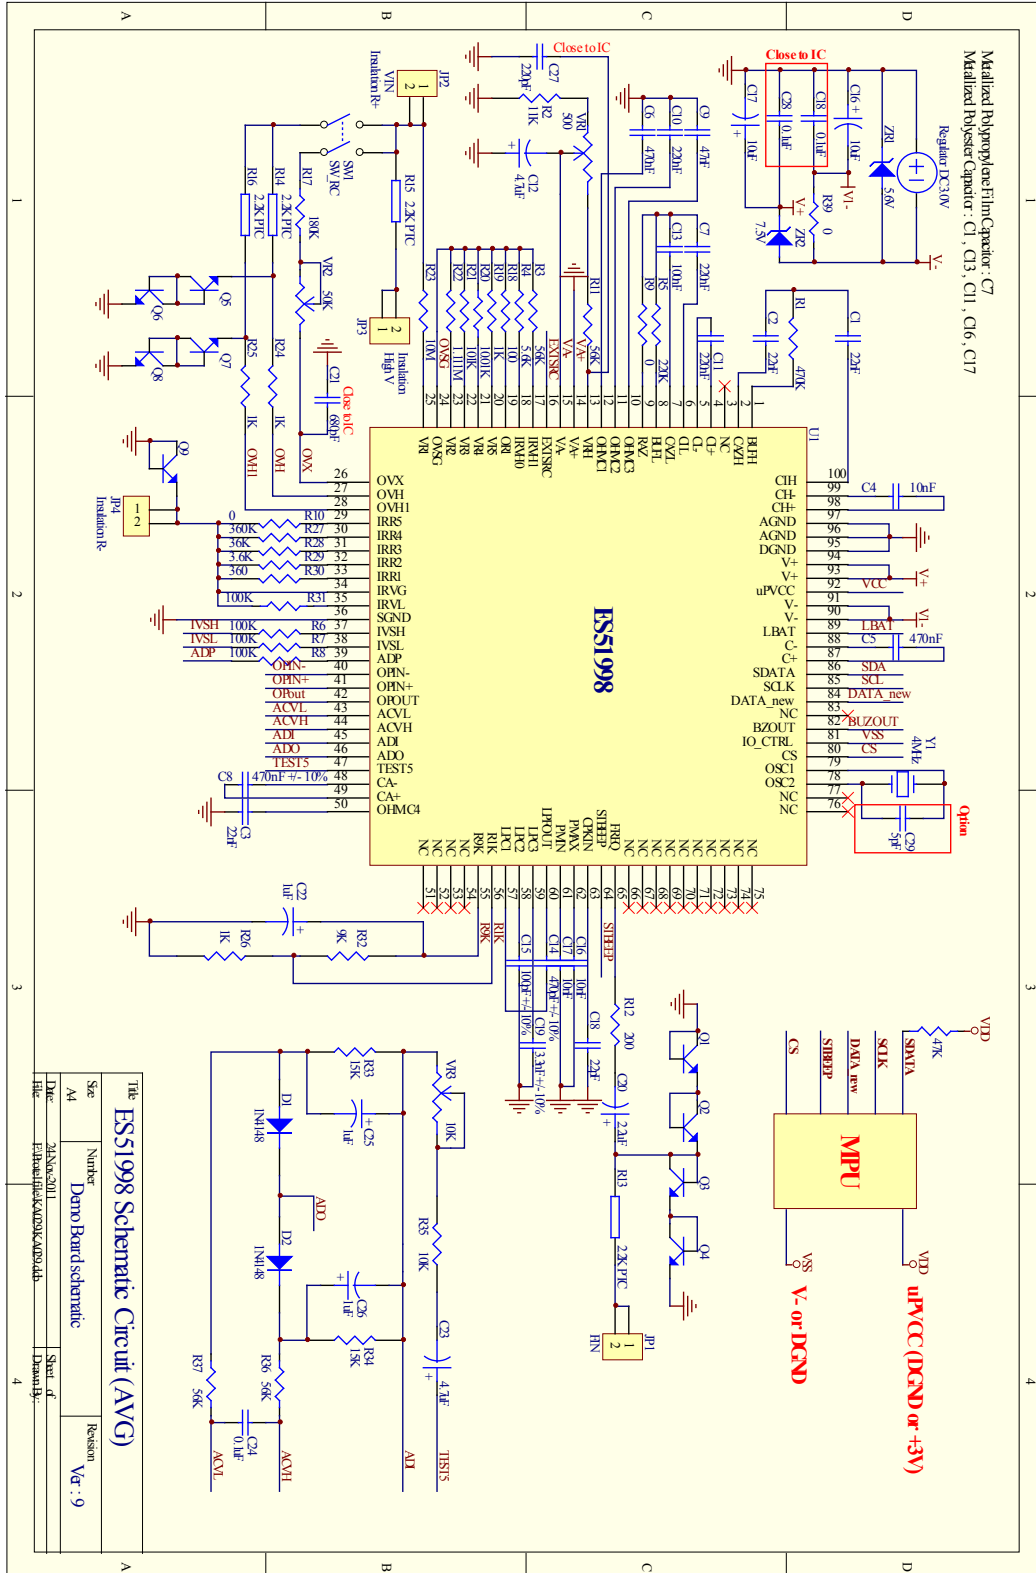




3.2 RMS circuit (ES636)

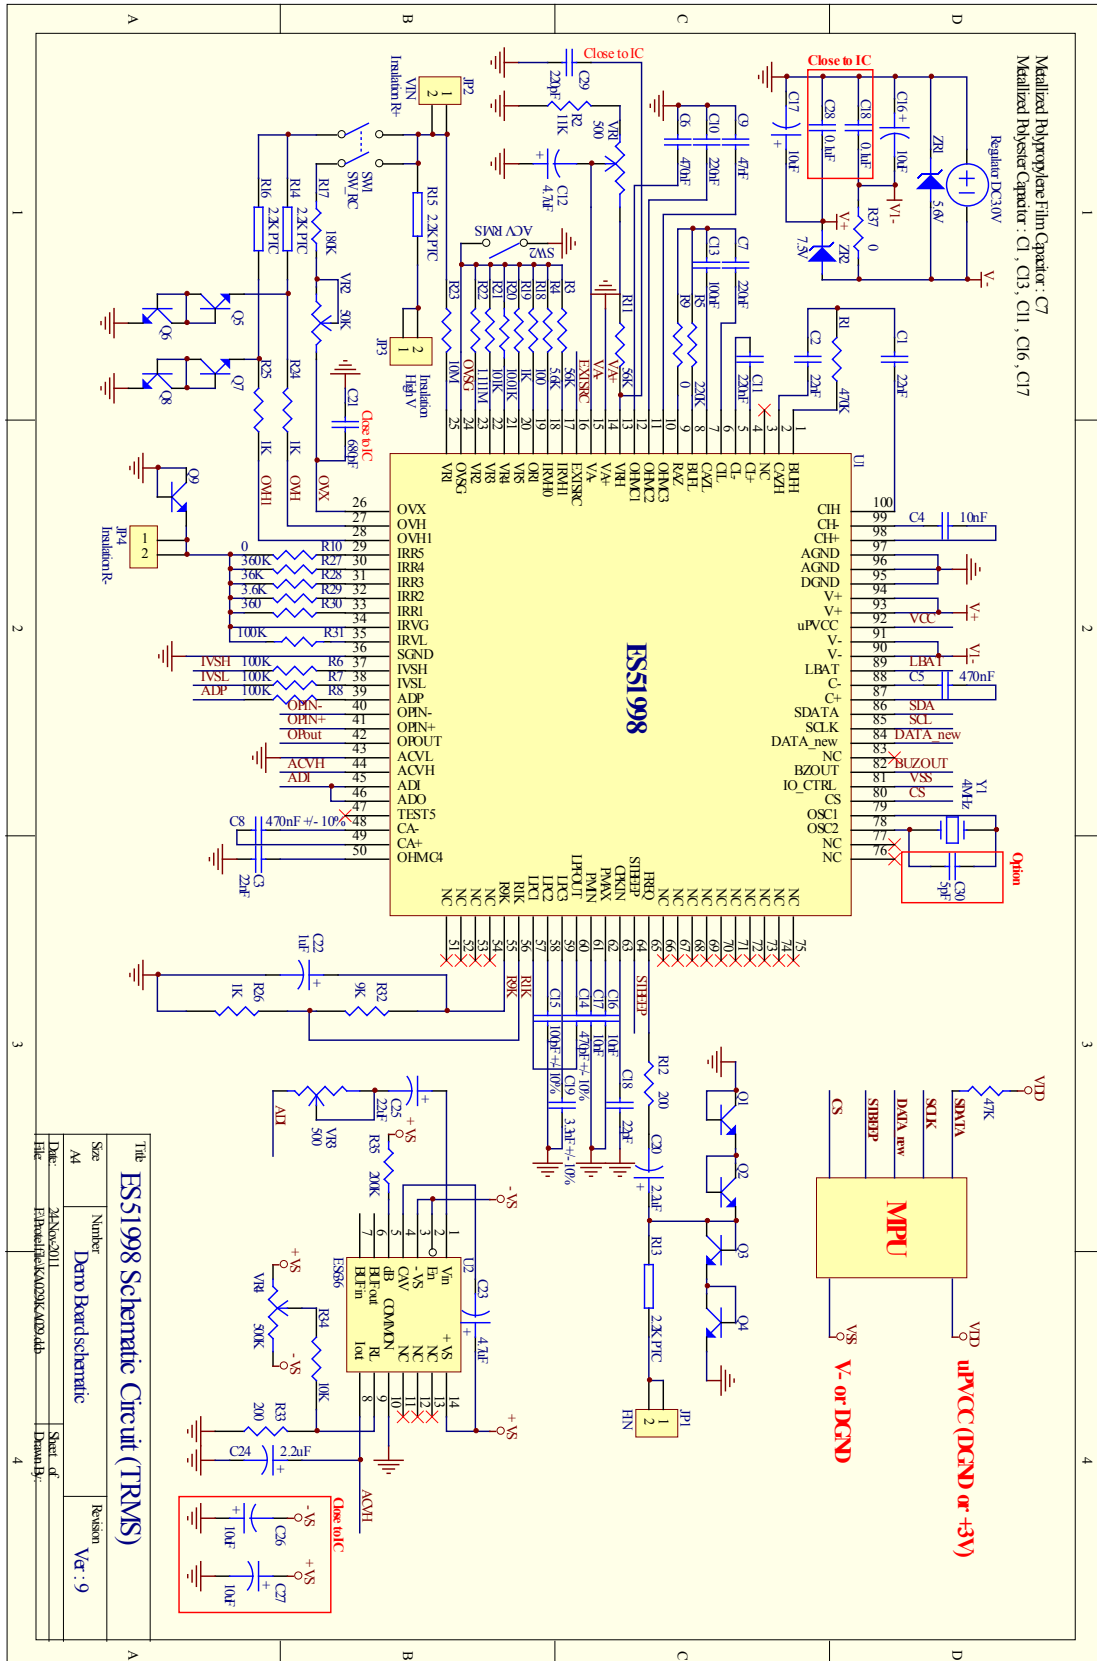



## 4. Package Information

### 4.1 100L LQFP Outline drawing

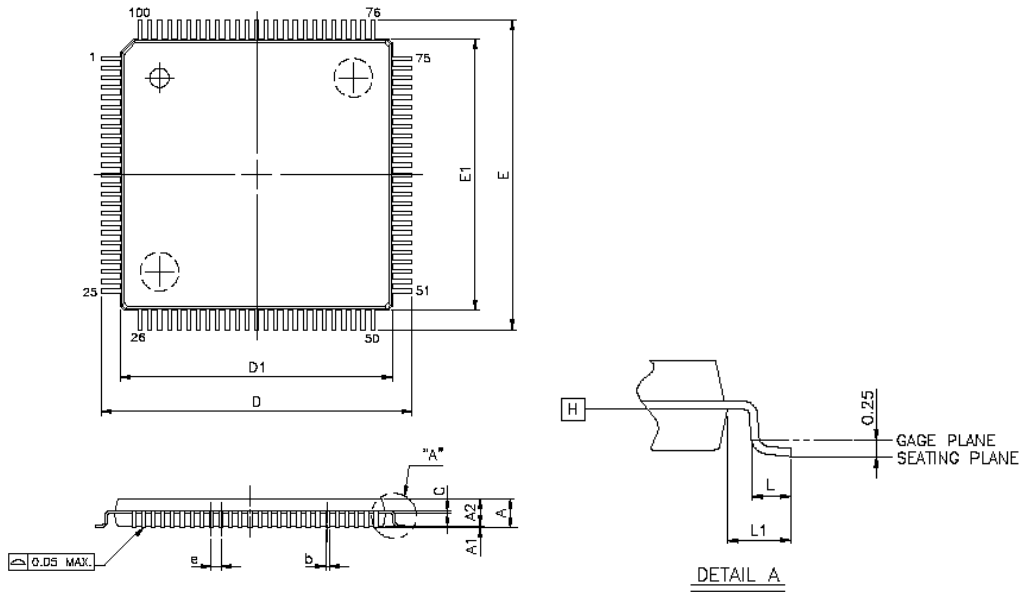

### 4.2 Dimension parameters

VARIATIONS (ALL DIMENSIONS SHOWN IN MM)

| SYMBOLS | MIN.      | NOM.  | MAX. |
|---------|-----------|-------|------|
| A       | --        | --    | 1.60 |
| A1      | 0.05      | --    | 0.15 |
| A2      | 1.35      | 1.40  | 1.45 |
| b       | 0.17      | 0.20  | 0.27 |
| c       | 0.09      | 0.127 | 0.20 |
| D       | 16.00 BSC |       |      |
| D1      | 14.00 BSC |       |      |
| E       | 16.00 BSC |       |      |
| E1      | 14.00 BSC |       |      |
| e       | 0.50 BSC  |       |      |
| L       | 0.45      | 0.60  | 0.75 |
| L1      | 1.00 REF  |       |      |